

PRODUCT

TECHNICAL DATA SHEETS



**70%
Savings
From
Labor and
Time.**

POLYPROPYLENE

**High Impact Strength and
Compression,
Pliable/Self Recovering,
Low Smoke Emission,
LSZH
Halogen Free
Smart Conduit.**



Product assessed in
SundaHus Material Data



1x2,5 + 1x1,5 H07V-U

1x2,5 + 1x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR GREY + BLACK



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

1x2,5 + 2x1,5 H07V-U

1x2,5 + 2x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR GREY + BLUE



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

2x2,5 + 1x1,5 H07V-U

2x2,5 + 1x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR GREY + BLUE



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

3x1,5 H07V-U

3x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR GREY + RED



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

5G1,5 H07V-U

5G1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR GREY - YELLOW



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

3G2,5 H07V-U

3G2,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR BLUE



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

3G2,5 + 1x1,5 H07V-U

3G2,5 + 1x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY





Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR GREEN



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	   / 

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

3G2,5 + 2x1,5 H07V-U

3G2,5 + 2x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR GREY



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

5G2,5 H07V-U

5G2,5 H07V-U + W/20 Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 300M
OF PALLET	1150-1150-1350 MM / 28 ROLLS

STRIPE COLOUR GREY



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca




Product assessed in
SundaHus Material Data



NO FLAME PROPA GATIONS

SERIES

EN 61386-22

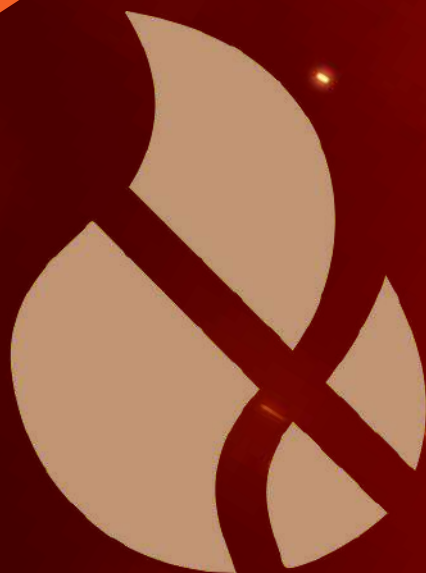

3G2,5 H07Z1-U

3G2,5 H07Z1-U + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product


CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS



STRIPE COLOUR BLUE - YELLOW



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07Z1-U * Cca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-3-31
EN 50575:2014+A1:2016-CPR-CLASS-Cca



Product assessed in
SundaHus Material Data

3G2,5 + 1x1,5 H07Z1-U

3G2,5 + 1x1,5 H07Z1-U + W/16Ø PRE WIRED CONDUIT
CABLE - 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS



STRIPE COLOUR GREEN + YELLOW



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07Z1-U * Cca
Colour of Cables	Four circular color swatches: blue, brown, green, and black, arranged horizontally.

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Cca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

3G2,5 + 2x1,5 H07ZZ1-U

3G2,5 + 2x1,5 H07Z1-U + W/16Ø PRE WIRED CONDUIT
CABLE - 100M / GREY

Properties of the Product


CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS



STRIPE COLOUR GREY + YELLOW



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07Z1-U * Cca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Cca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

5G2,5 H07Z1-U

5G2 H07Z1-U + W/20 Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product


CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 300M
OF PALLET	1150-1150-1350 MM / 28 ROLLS



STRIPE COLOUR GREY - YELLOW



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07Z1-U * Cca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423
EN 50525-3-31
EN 50575:2014+A1:2016-CPR-CLASS-Cca



Product assessed in
SundaHus Material Data



TELE COMMUNI CATIONS

SERIES



CAT 6 U/UTP


CAT 6 U/UTP + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR WHITE

Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	CAT 6 U/UTP * Eca
Colour of Cables	

Standart of Conduits EN 61386-22, IEC60423
Standart of Cables EN 50575
Standart of CPR EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN



CAT 6 U/UTP LSZH


CAT 6 U/UTP LSZH + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR WHITE

Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	CAT 6 U/UTP * Dca
Colour of Cables	


Standart of Conduits EN 61386-22, IEC60423
Standart of Cables EN 50575
Standart of CPR EN 50575:2014+A1:2016-CPR-CLASS-Dca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN

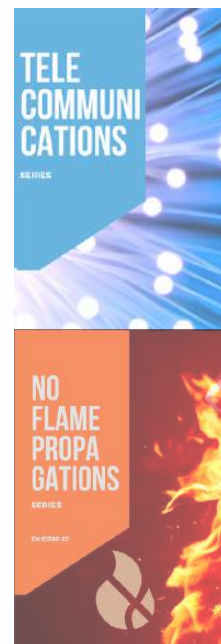

ECO COAXCIAL

ECO COAXCIAL + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGHTS DIMENSIONS	100M & 400M
OF PALLET	1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR ORANGE



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	ECO COAXCIAL * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423

EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN



2 X CAT 6 U/UTP

2 X CAT 6 U/UTP + W/20Ø PRE WIRED CONDUIT CABLE
- 100M / GREY



Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M & 300M 1150-1150-1350 MM / 28 ROLLS



STRIPE COLOUR WHITE + GREY



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	CAT 6 U/UTP LSZH * Eca
Colour of Cables	

Standart of Conduits EN 61386-22, IEC60423
Standart of Cables EN 50575
Standart of CPR EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data




BEDÖMNINGEN

2 X CAT 6 U/UTP LSZH

2 X CAT 6 U/UTP + W/20Ø PRE WIRED
CONDUIT CABLE - 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M & 300M 1150-1150-1350 MM / 28 ROLLS

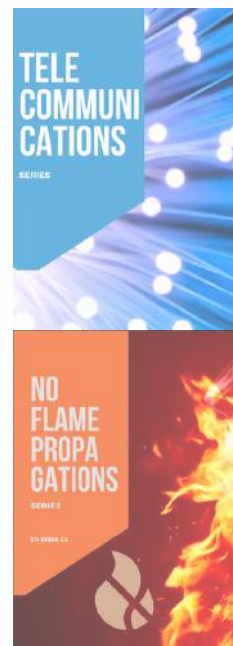

STRIPE COLOUR WHITE + GREY



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	CAT 6 U/UTP LSZH * Dca
Colour of Cables	

Standart of Conduits EN 61386-22, IEC60423
Standart of Cables EN 50575
Standart of CPR EN 50575:2014+A1:2016-CPR-CLASS-Dca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN

ECO COAX X CAT 6 U/UTP

ECO COAXIAL + CAT 6 U/UTP + W/20Ø PRE WIRED CONDUIT
CABLE - 100M / GREY



Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M & 300M 1150-1150-1350 MM / 28 ROLLS



STRIPE COLOUR ORANGE + GREY



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	Eca
Colour of Cables	

Standart of Conduits EN 61386-22, IEC60423
Standart of Cables EN 50575
Standart of CPR EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN

2 X 0,80 YR

2 x 0,80 YR + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M & 400M 1100-1100-1350 MM / 32 ROLLS

STRIPE COLOUR WHITE + YELLOW



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	YR 0,8 mm ² * Dca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423


EN 50575:2014+A1:2016-CPR-CLASS-Dca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN

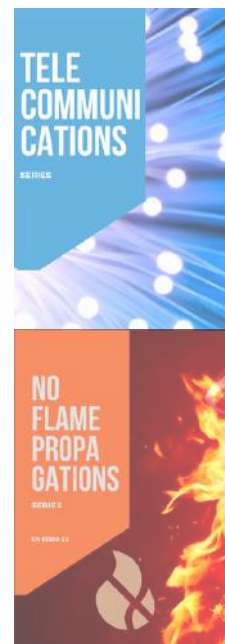


4 X 0,80 YR

4 x 0,80 YR + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET STRIPE	1100-1100-1350 MM / 32 ROLLS
COLOUR	WHITE + BLUE

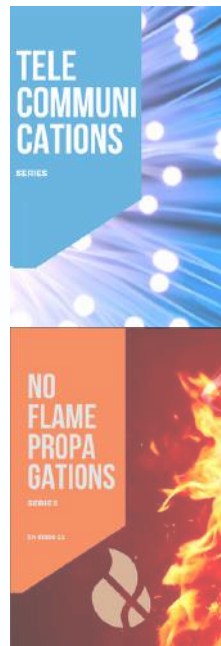

Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	YR 0,8 mm ² * Dca
Colour of Cables	

Standart of Conduits EN 61386-22, IEC60423
Standart of Cables
Standart of CPR EN 50575:2014+A1:2016-CPR-CLASS-Dca



Product assessed in
SundaHus Material Data




BEDÖMNINGEN

6 X 0,80 YR

6 x 0,80 YR + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET STRIPE	1100-1100-1350 MM / 32 ROLLS
COLOUR	WHITE + GREEN

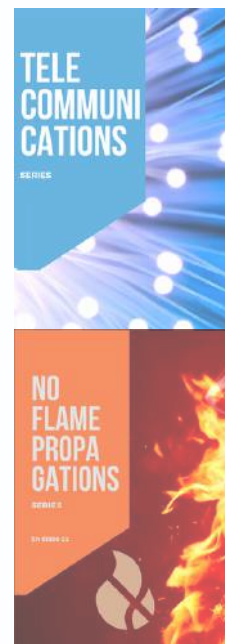

Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	YR 0,8 mm ² * Dca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423

EN 50575:2014+A1:2016-CPR-CLASS-Dca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN

6 X 0,22 mm² + 0,22 mm²

6 X 0,22 mm² + 0,22 mm² LIY(st)Y + W/16Ø PRE WIRED CONDUIT
CABLE - 100M / GREY




Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET STRIPE	1100-1100-1350 MM / 32 ROLLS
COLOUR	BLACK + GREEN



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	LIY(st)Y 6x0,22 mm ² * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423

EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN

8 X 0,22 mm² + 0,22 mm²

8 X 0,22 mm² + 0,22 mm² LIY(st)Y + W/16Ø PRE WIRED CONDUIT CABLE - 100M / GREY




Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M & 400M
OF PALLET STRIPE	1100-1100-1350 MM / 32 ROLLS
COLOUR	BLACK + BLUE



Properties of the Conduits and Cable

Conduit Material	Flame Retardant / Polypropylene
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	LIY(st)Y 8x0,22 mm ² * Eca
Colour of Cables	

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, IEC60423

EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN